

Tie Front Ruffle Hem Mini Skirt




INSTRUCTION

BOOKLET

Table of Contents

3	What do I need to start sewing?
4	Printing instructions
6	Size chart
7	Patterns
8	Sewing instructions
16	Glossary

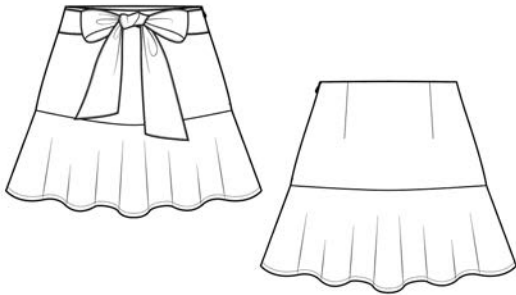

COPYRIGHT - All rights reserved.
© Patterns For Less

Written permission is required to copy and/or distribute copies of this document, whether or not it is for profit. Photocopying, digitizing or copying this document to share is strictly prohibited.

Help support the development of Patterns For Less sewing patterns by checking out the [bestsellers](#) and [new arrivals](#).

Sign up to my email list for discounts and exciting store updates!


PatternsForLess.com

For inquiries, questions, drop me a message on

IG: [PatternsForLess](#)
info@patternsforless.com

Please reach out to us if you have any questions about the sewing pattern or step by step instructions, we are happy to help!

What do I need to start sewing?




Sewing machine
Overlock/Serger
Pattern printout
Sewing thread
Measuring tape
Water erasable pen/Chalks
Scissors
Ruler
Pins



Fusible interfacing
7 ¾" or 19.7cm long invisible zipper

Our favorite sewing supplies!

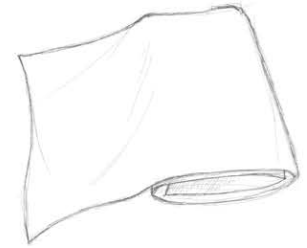

1½ yard x 60" width poly twill satin fabric

Fabric Recommendations: satin, charmeuse, polyester, cotton twill, linen, canvas, denim, suede, faux leather, velvet.

Check out all the fabric options we love!

Testing a sewing pattern with muslin fabric is important because:


Muslin is inexpensive and allows you to adjust the fit before using costly fabric. It helps you see how the pattern pieces work together and make necessary changes. You can practice techniques and construction methods. It's a low-risk way to experiment with design modifications. Muslin saves money by preventing costly mistakes with your final fabric.

In essence, it helps ensure your final garment fits well and turns out as expected.

Printing Instructions

Let's print out the pattern!

The sewing pattern comes with 3 different printing options! The US Letter and A4 print is a tile version PDF that you can print out at home. The A0 version is used by a printshop to print on a single sheet of paper and saves time taping the separate pages together.

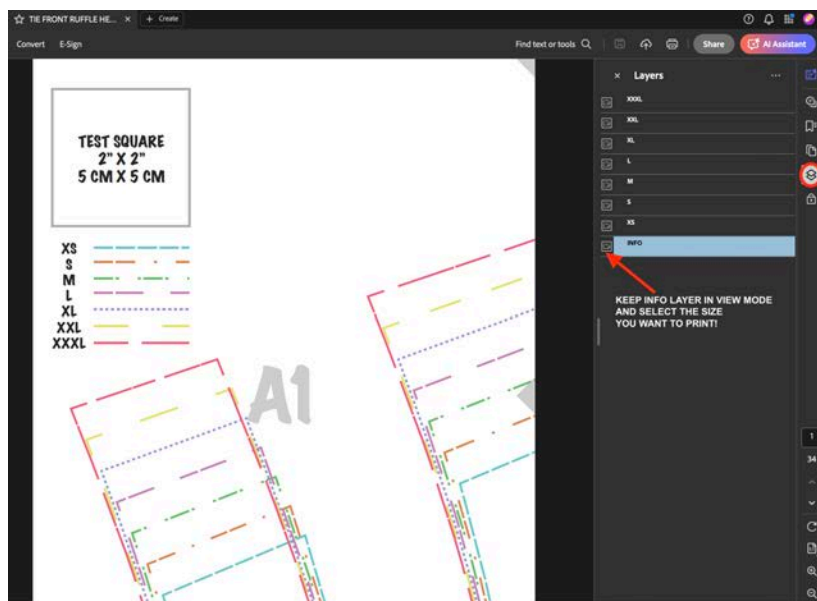


Additionally, you can use view mode to only select/print the size you are working on. Each pattern file is designed with layers of different sizes. There is an option to print only your size or all sizes based on your preference. Open the file in Adobe Acrobat and keep in legend layer.

If you print at home, then you need to trim each sheet by cutting off the top and excess margin. Tape each page together by row, and then attach the rows together. Use the diamond marks to align everything!


Always make sure to print on 100% scale.
(Do not 'fit to page' or reduce the size!)

There is a test square on the first page of the pattern.
Use as a scale to check if the dimensions are 5x5cm and/or 2x2".

A4

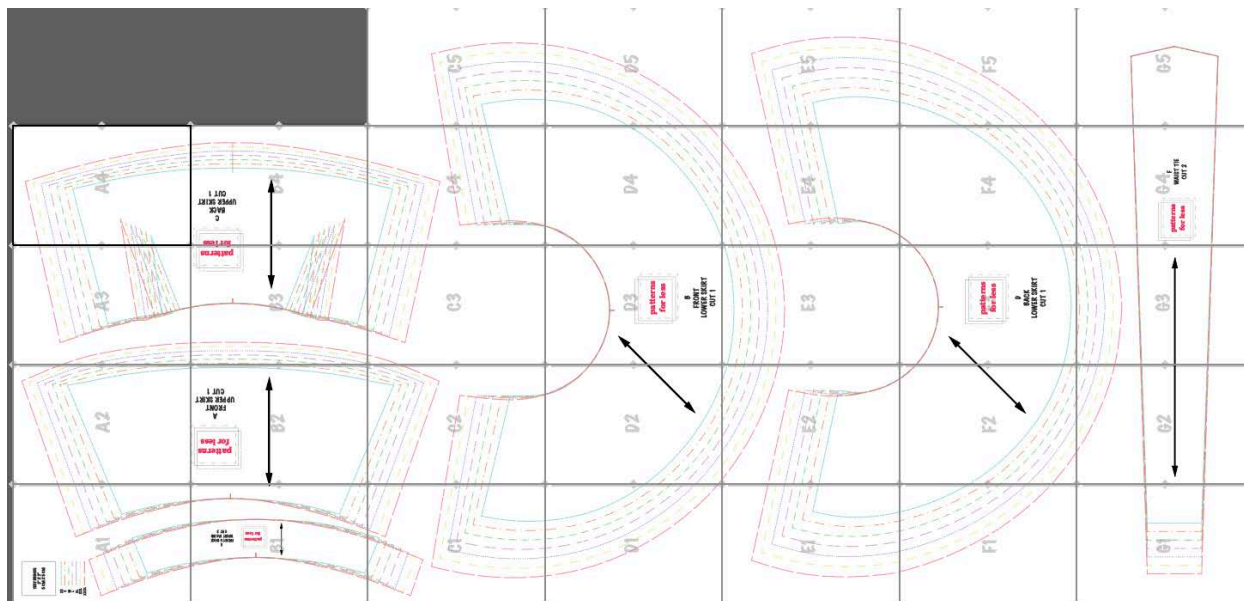

US Letter

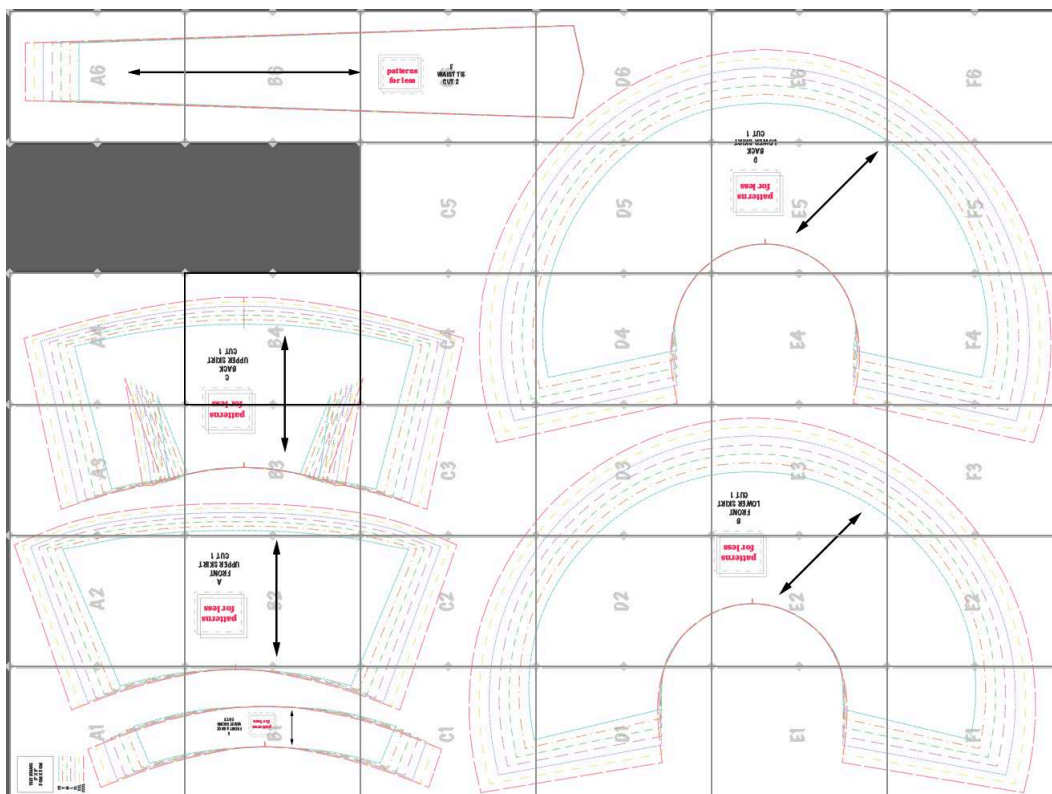

Size Chart

inches

SIZE	BUST	WAIST	HIP
XS	30	25	36
S	33	27	38
M	36	29	40
L	39	31	42
XL	41	33	44
XXL	44	35	46
XXXL	47	37	48

centimeters


SIZE	BUST	WAIST	HIP
XS	76	63	91
S	84	68	96
M	91	74	102
L	99	79	107
XL	104	84	112
XXL	112	89	117
XXXL	119	94	122

FINISHED GARMENT MEASUREMENT

SIZE	LENGTH	WAIST	HIP
XS	14 1/8" 36 CM	25 1/8" 64 CM	47 3/4" 96 CM
S	14 6/8" 37 CM	26 3/4" 68 CM	39 3/8" 100 CM
M	15" 38 CM	28 1/4" 72 CM	40 7/8" 104 CM
L	15 6/8" 39.5 CM	30 6/8" 78 CM	43 1/4" 110 CM
XL	16 1/8" 41 CM	33" 84 CM	45 6/8" 116 CM
XXL	16 3/4" 42.5 CM	35 3/8" 90 CM	48" 122 CM
XXXL	17 3/8" 44 CM	37 3/4" 96 CM	50 3/8" 128 CM

* This data was obtained from manually measuring the product, it may be off by 1-2cm

Patterns

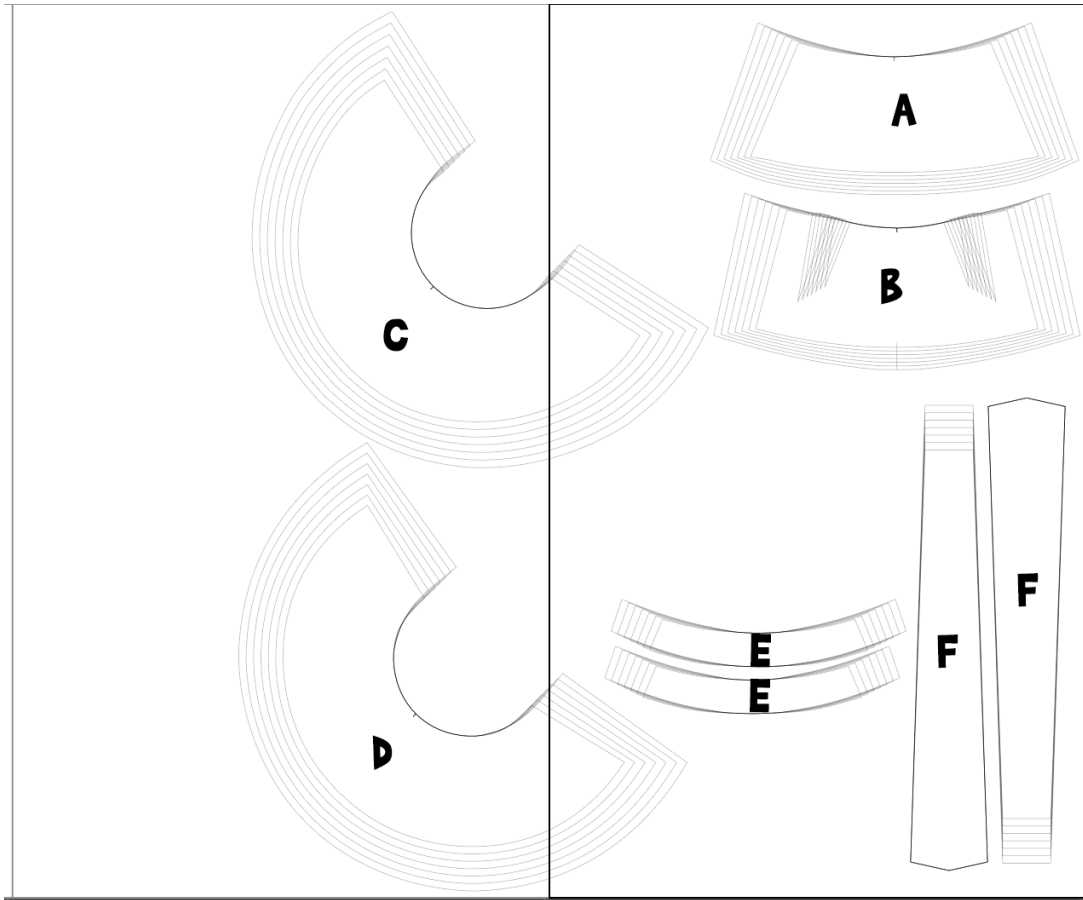


Tie front ruffle hem mini skirt pattern pieces include:


- A- Front Upper Skirt, cut 1
- B- Front Lower Skirt, cut 1
- C- Back Upper Skirt, cut 1
- D- Back Lower Skirt, cut 1
- E- Front and Back Waist Facing, cut 2
- F- Waist Tie, cut 2

$\frac{3}{8}$ " or 1cm seam allowance is already included unless indicated on the pattern or instruction book.


Sewing Instructions

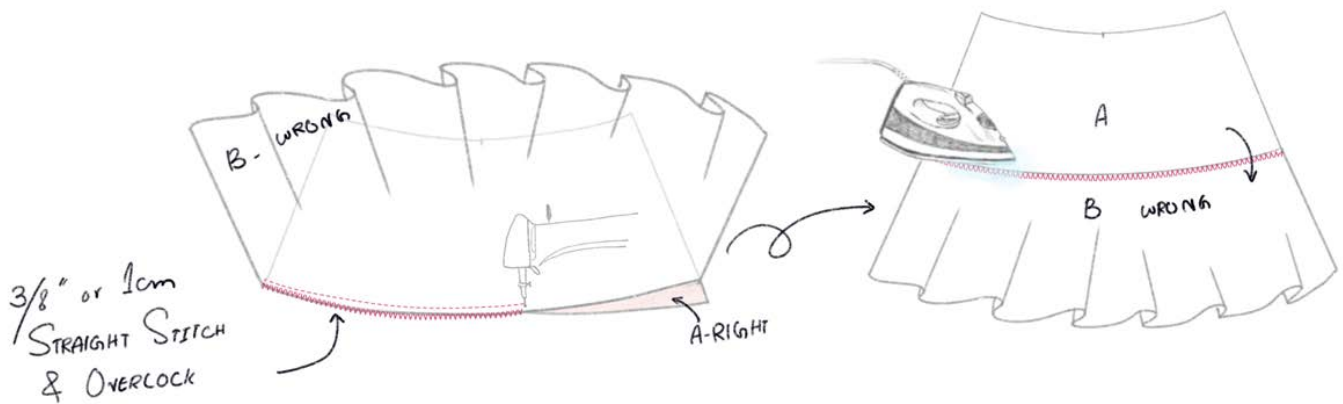


Step 1- Place Front Upper Skirt (A) and Front Lower Skirt (B) right sides together. Join the seam around the hip with $\frac{3}{8}$ " or 1cm width straight stitch. Overlock stitch the seam allowance and press the seam toward the Front Lower Skirt (B).

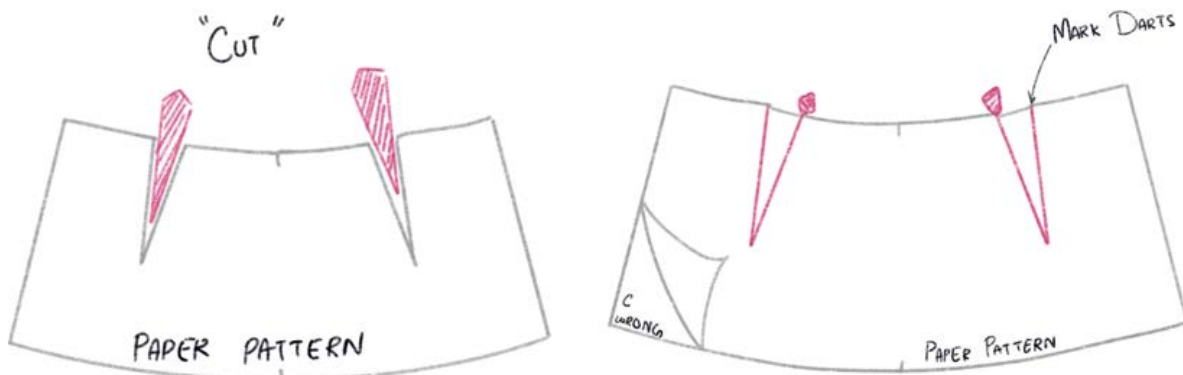

Step 2- Cut out the dart from the paper pattern and layover on the wrong side of the Back Upper Skirt (C). Mark the dart legs and dart point using chalk or water erasable pen.

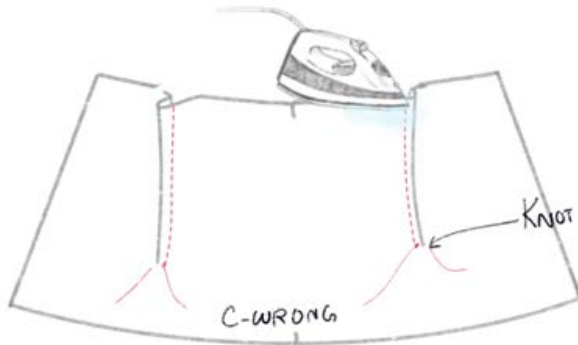



Step 3- Sew the darts from point to dart leg without backstitching. Finish the ends by hand tying with double knots. Press the darts toward the side seam.

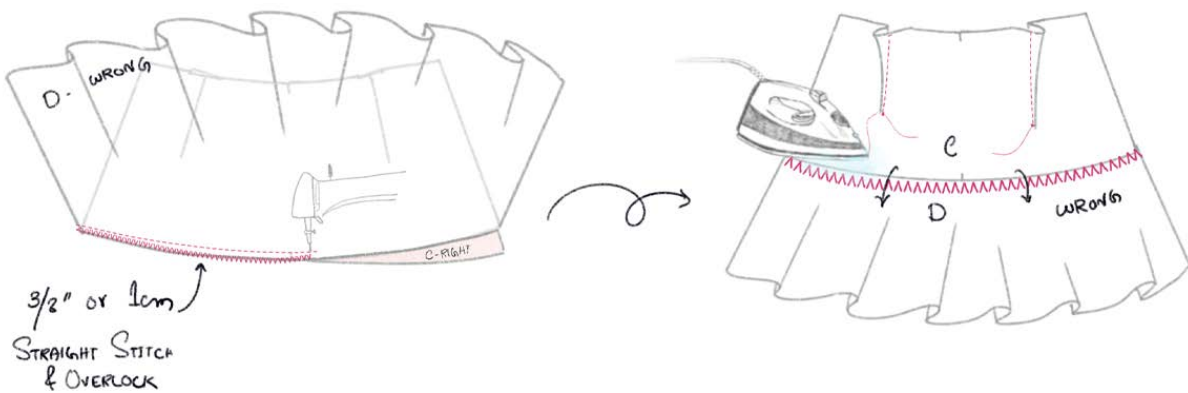


Step 4- Place Back Upper Skirt (C) and Back Lower Skirt (D) right sides together. Join the seam around the hip $\frac{3}{8}$ " or 1cm width straight stitch. Overlock stitch the seam allowance and press seam toward the Front Lower Skirt (B).

Step 5- On the wrong side of Front and Back Waist Facing (E), apply a fusible interfacing with light steam iron. Ensure to fuse on the wrong side of both Front and Back Waist Facing (E) pieces.

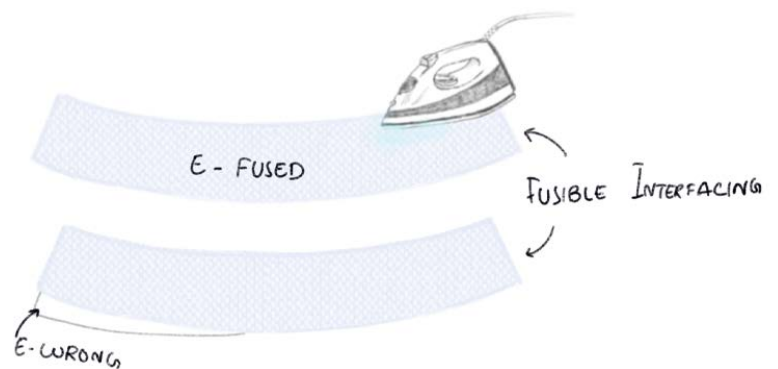


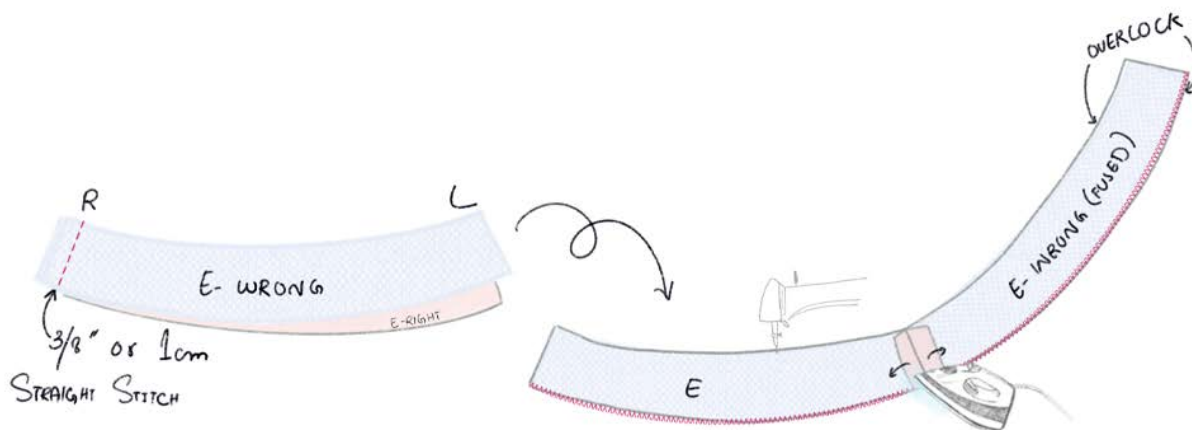

Step 6- Place Front and Back Waist Facing (E) pieces right side together. Straight stitch wearer's right side seams $\frac{3}{8}$ " or 1cm width and press seam open. Overlock stitch along the curved edge to complete.

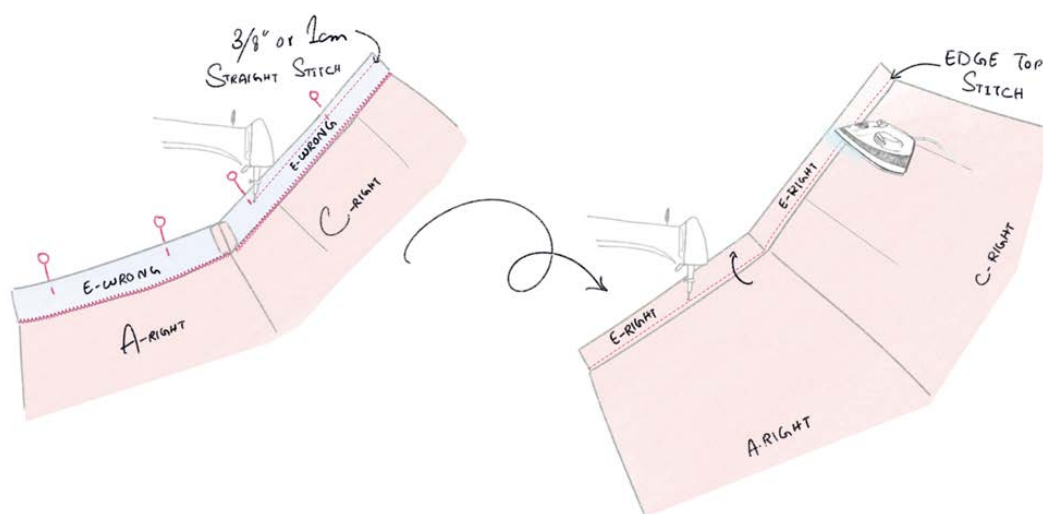



Step 7- Slide the Front and Back Waist Facing (E) through the right side of Front and Back Upper Skirt (A&C) waist opening and pin around. Connect the two pieces together $\frac{3}{8}$ " or 1cm width straight stitch. Press the Front and Back Waist Facing (E) open and closely edge topstitch on the Front and Back Waist Facing (E).

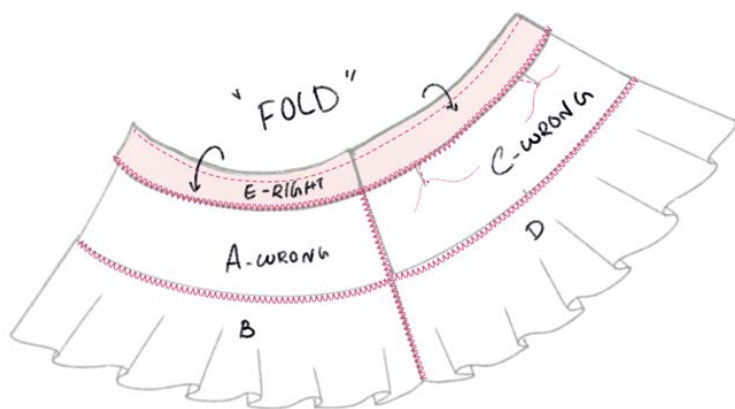


Step 8- Fold the Front and Back Waist Facing (E) over toward the wrong side of Front and Back Skirt (A&B&C&D).

Step 9- Separately overlock stitch the wearer's left side seam of Front and Back Skirt (A&B&C&D). Ensure to overlock stitch Front and Back Waist Facing (E) as well.

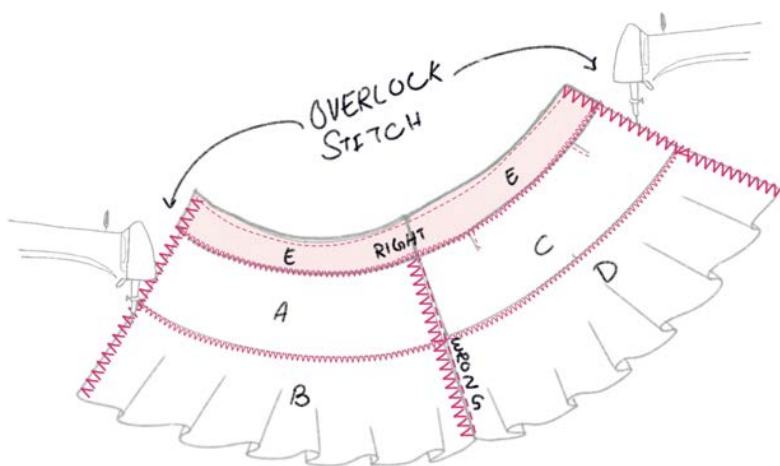


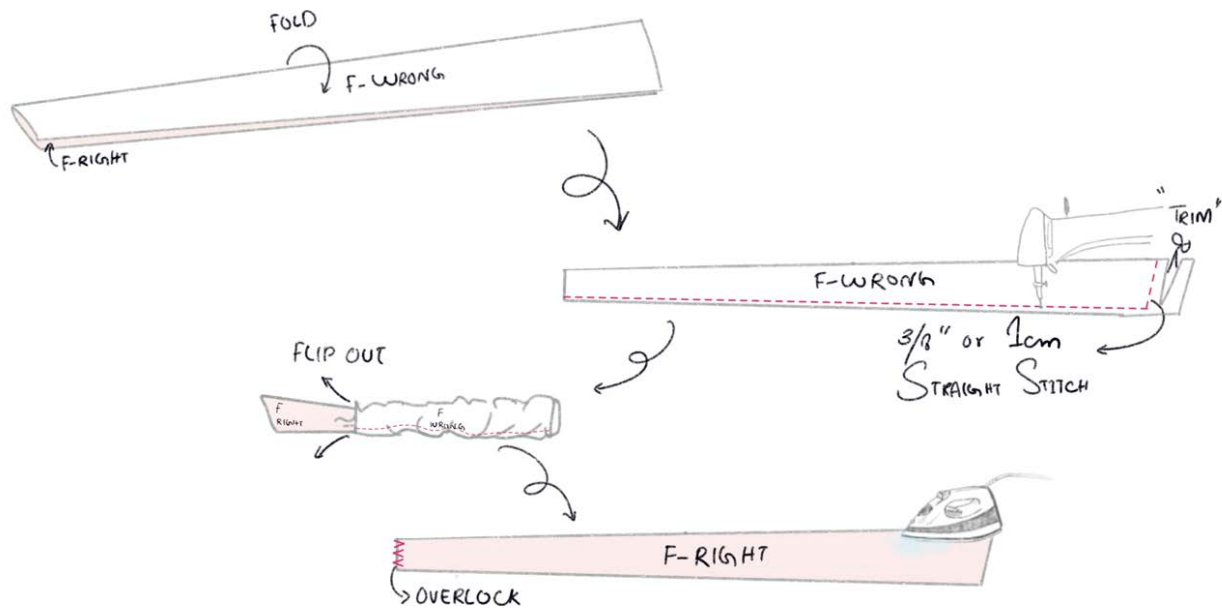


Step 10- Fold the Waist Tie (F) in half lengthwise right side together and sew around the long edges with $\frac{3}{8}$ " or 1cm width, except the short edge. Trim the seam allowance to $\frac{1}{4}$ " or 0.6cm and clip the pointy corner. Flip the Waist Tie (F) right side out and press. Overlock stitch the short end opening. Repeat the process to create another Waist Tie (F).

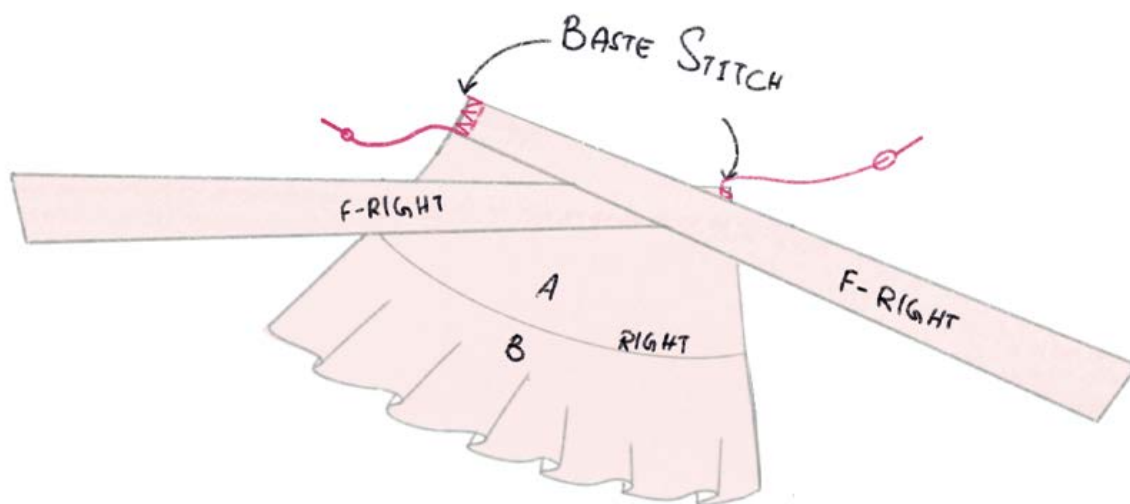


Step 11- Place the Waist Tie (F) on the right side of Front Upper Skirt (A) matching the side seams and baste stitch to secure the position.

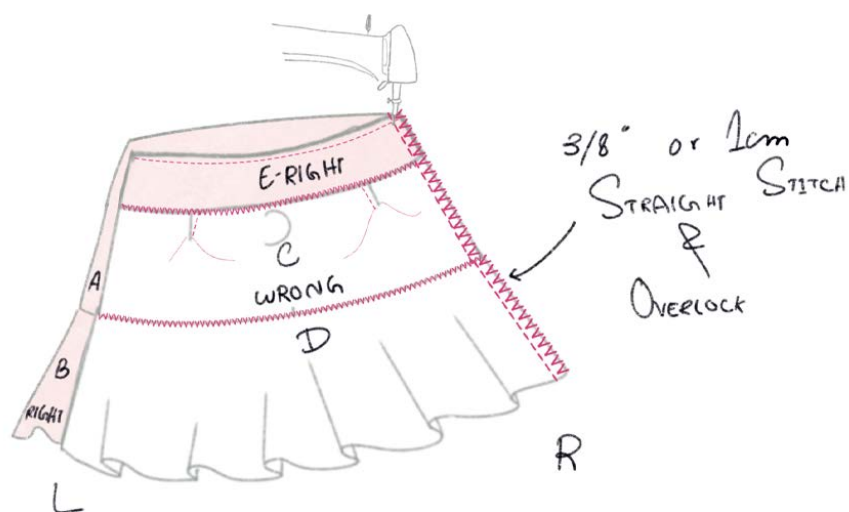

Step 12- Place Front Skirt (A&B) and Back Skirt (C&D) right side together. Close the wearer's right side seam with $\frac{3}{8}$ " or 1cm straight stitch.

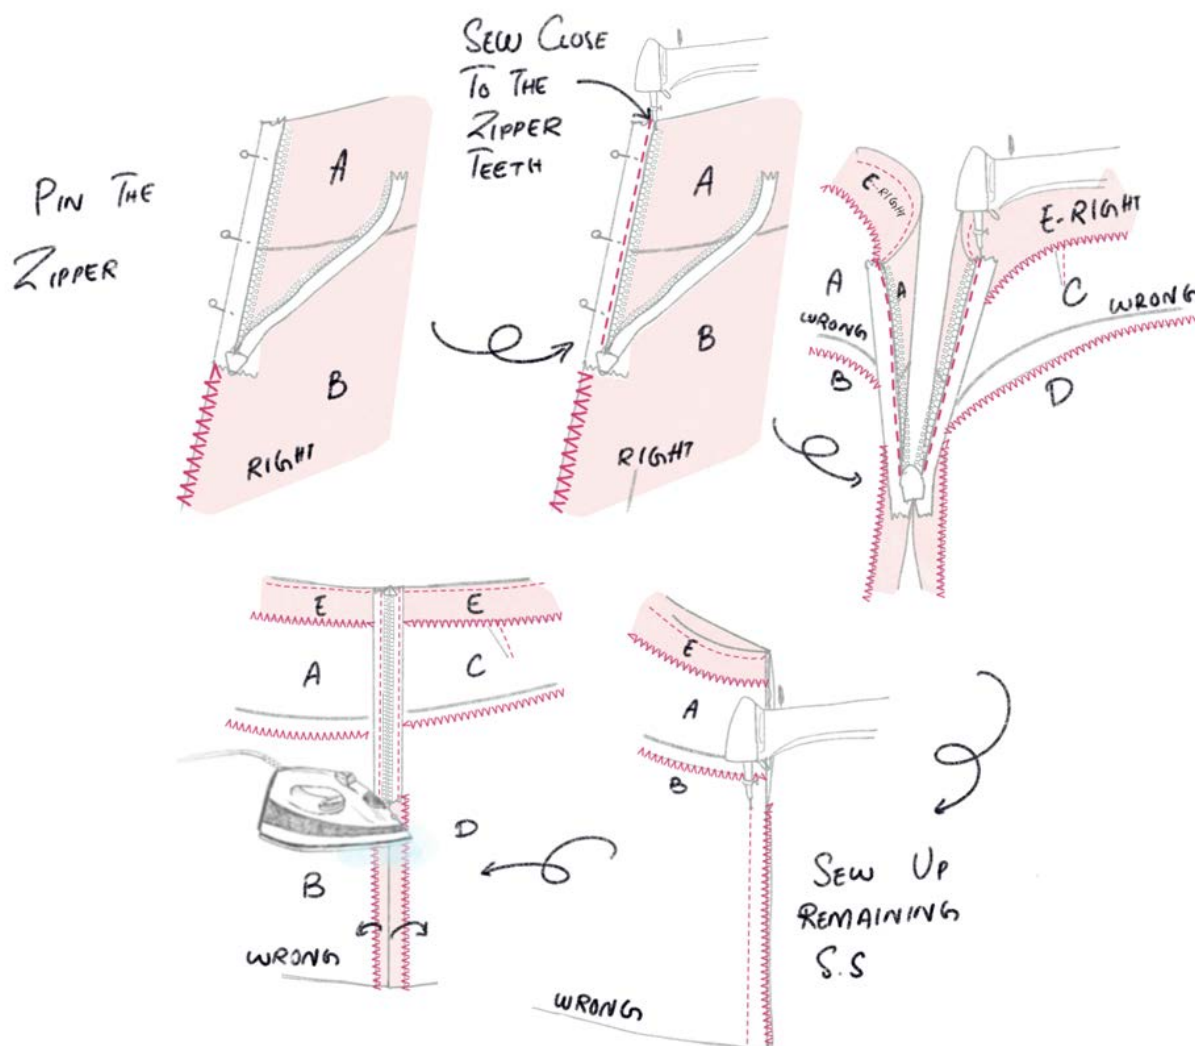


Step 13- Insert an invisible zipper at the right side seam of the skirt. Open the zipper, then place the zip tape on the right side of the Front Skirt (A&B) and sew closely to the zipper teeth. Do the same to the other side of zipper tape on the left side of the Back Skirt (C&D). Sew up the remainder of the wearer's left side seam and press seam open.

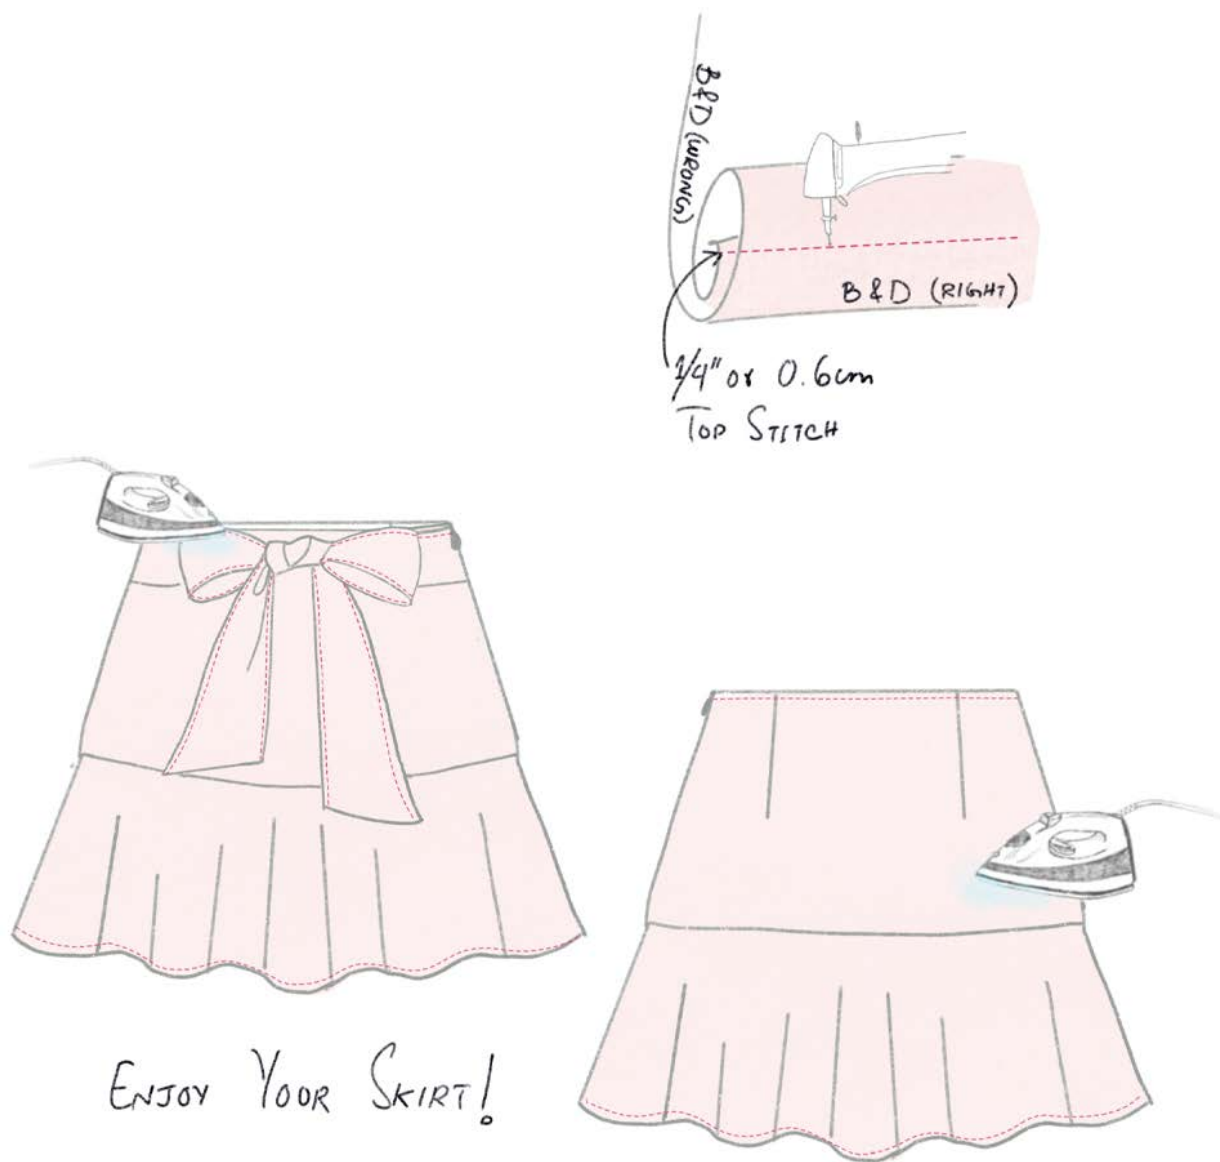

Step 14- Double fold the hem of the Front and Back Lower Skirt (B&D) 1/4" or 0.6cm and topstitch. Gently press all around the seam and enjoy your tie front ruffle hem mini skirt!



Sewing Glossary

Back Stitch

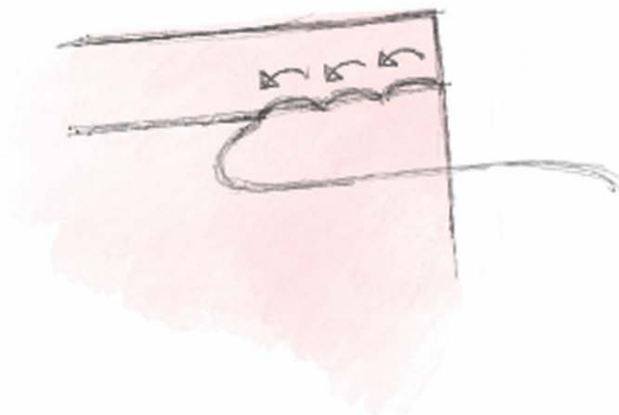


When you start a new seam or finish the seam, always backstitch by hitting the reverse button on your sewing machine. Back stitching consists of 3-4 stitches to lock the stitching and prevent unraveling.

Bias Tape

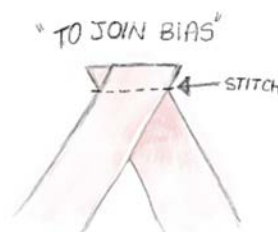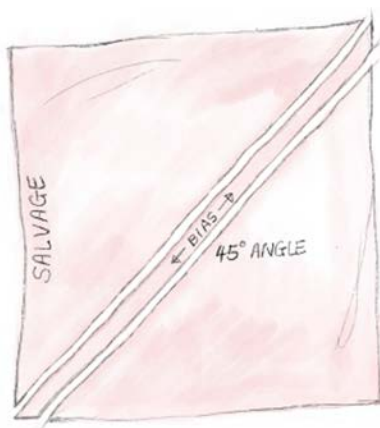

Bias tape is widely used in neckline, spaghetti strap, and other garment finishings. Prepare the bias strap by cutting in half diagonally to give a nice stretch. When needing to make a long continuous bias tape, sew the diagonal pieces together as long as you need.


Buttonholes

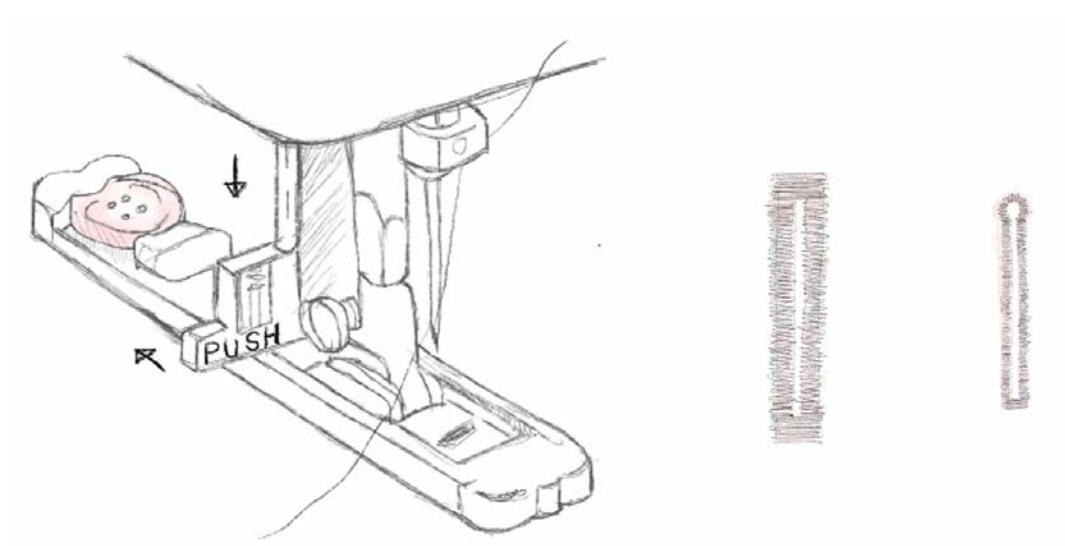

There are various styles of buttonholes you can create with your sewing machine. For cleaner look, add interfacing and sew over the buttonhole more than once to create nice tight holes.


Use a buttonhole foot by inserting the button in the back of the foot, and snap the foot into place. Pull the button hole lever down, and select the buttonhole stitch on your machine. Press the pedal and stitch away, your machine will automatically go through the steps to make an accurate buttonhole.

Edge Stitch

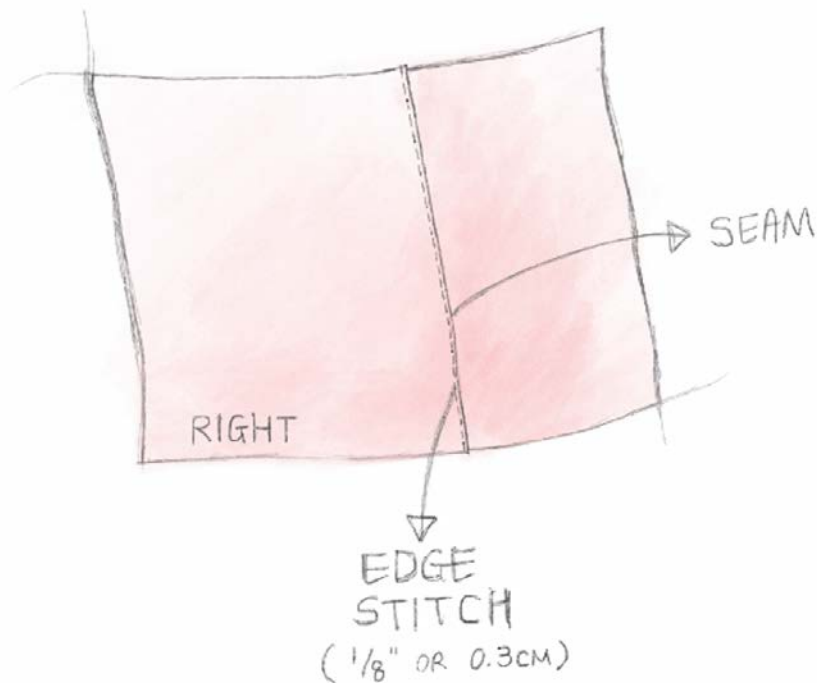

Edge stitches are typically used to decorate or emphasize the original seam line. To achieve clean edge stitch, use a special footer to sew close to the edges without gliding off. Sew slowly to control the fabric.


Flat Felled Seam

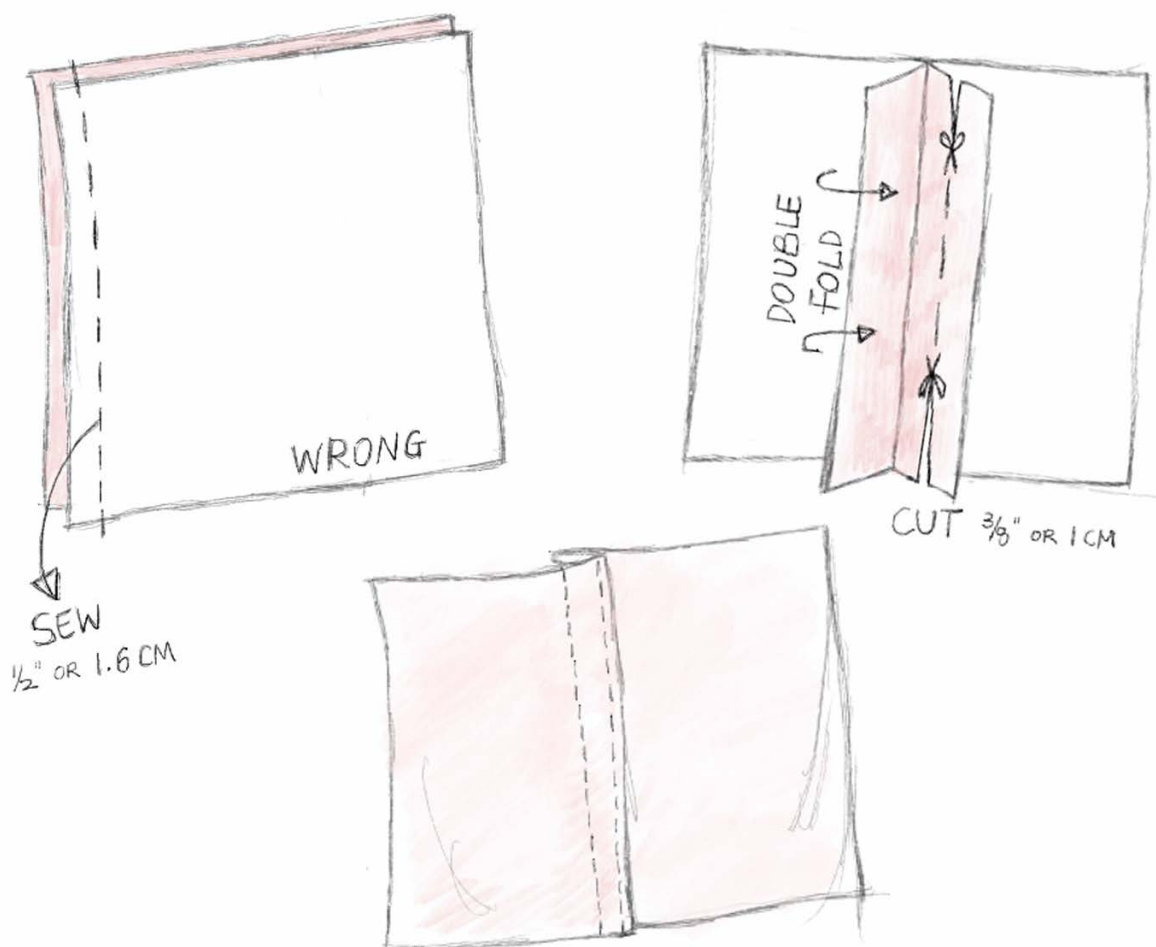

Flat felled seam or jeans seams is a great way to sew heavy duty fabric or bottoms to strengthen the garment.

Sew the fabric right sides facing each other. Trim one of the seam allowances in half. Turn the raw edge under and fold over to hide the half cut edge. Topstitch down the enclosed seam allowance.


French Seam

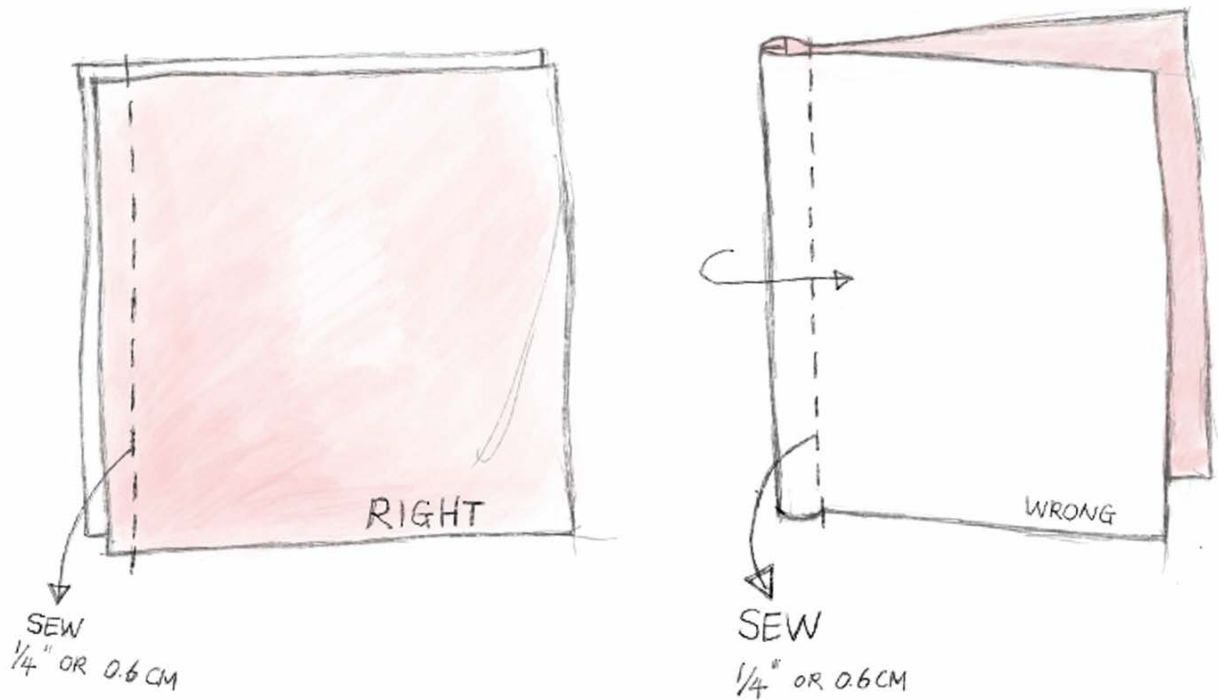

When sewing silk or chiffon with delicate fabrication, French seams are a great way to achieve an excellent quality finish.


Place wrong sides of fabric facing each other and sew $\frac{1}{4}$ " or 0.6cm. Press the seam and fold the fabric along the seam line. Enclose the seam by stitching $\frac{1}{4}$ " or 0.6cm from the folded edge.

Hand Basting

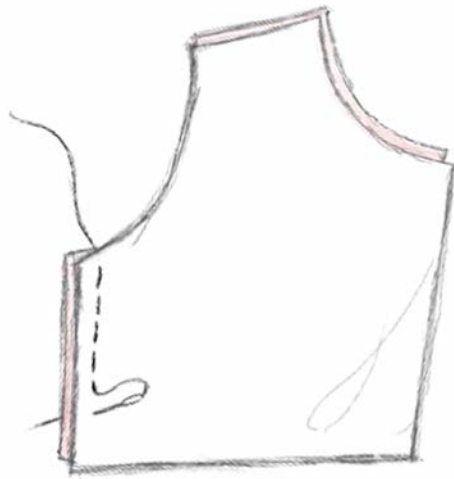


Basting or running stitches are simple hand stitches to use instead of pinning or gathering. Alternatively, you can increase the stitch length and loosen tension on your sewing machine to create a basting look.

Open Seam

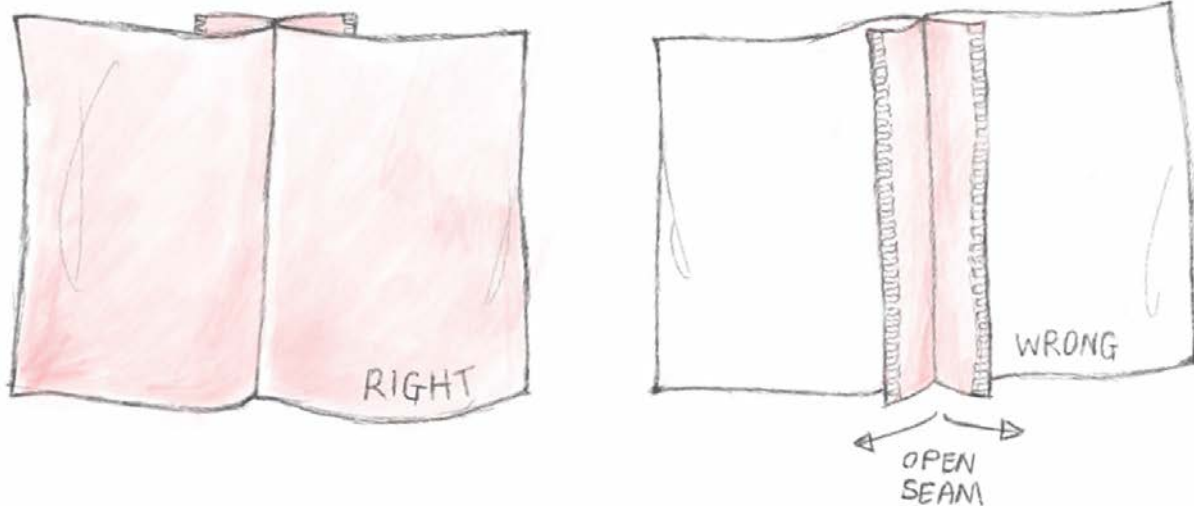

Open seams are a technique used to make the seams clean and flat. It can be used for CF, CB, or side seams. Overlock both raw edges first, and then stitch the 2 pieces together to iron the seam open.


Overlock

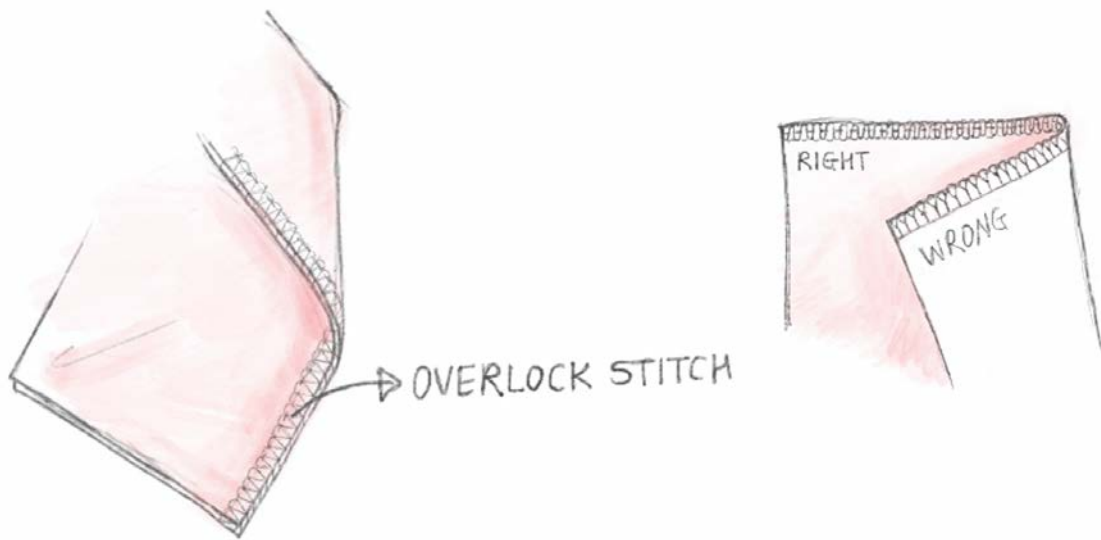

Overlock stitches help to bind raw cut edges to prevent from fraying. This technique is mostly accomplished by overlock machine, serger, or your home sewing machine with overlock stitch setting.

Overlock machines have 2 to 3 needles and 2 top threads and lower threads to braid and stitch, which results in a variation of blanket stitch. The knife blade cuts the fabric edge to give a clean overlock stitch.


Pivoting

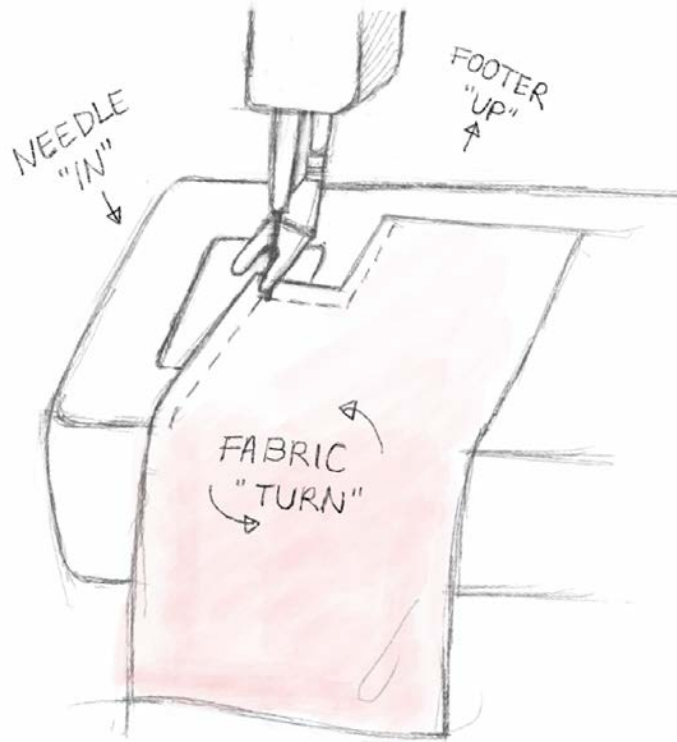

Use the pivoting method when sewing corners or at an angle such as pocket corners, tip of collars, v-neckline, etc.


Execute the technique by leaving the needle in the fabric, lift the footer, and then turn the fabric as much as you need. Continue to sew by lowering the footer again, then stitch in the new direction.

Pressing

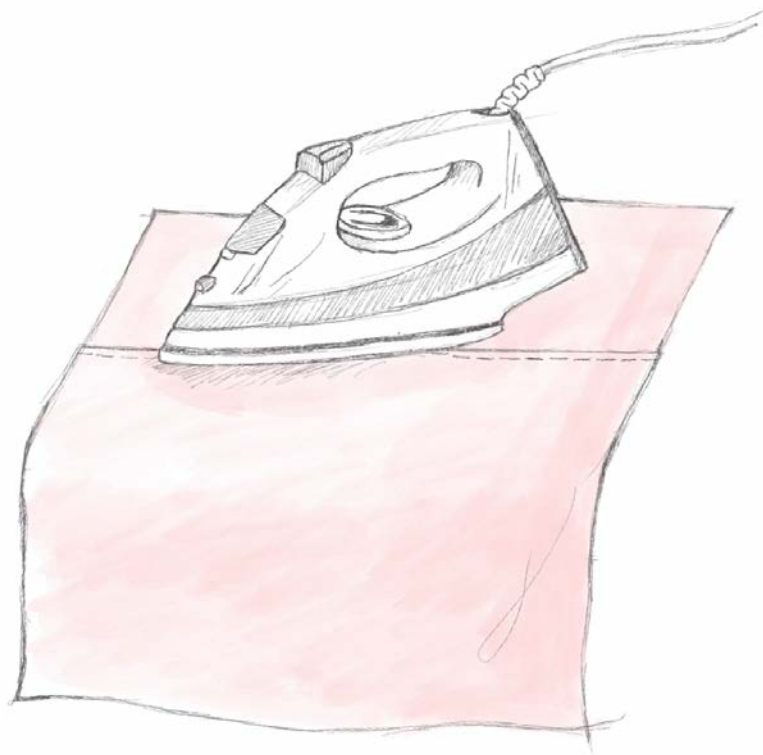

Steam and iron with pressure after every stitch you make in the garment. Pressing helps to relax the threads and finish the seams cleanly. Be aware to avoid extreme steam on natural fabrics such as cotton and linen due to the risk in shrinkage.


Right side - Wrong side

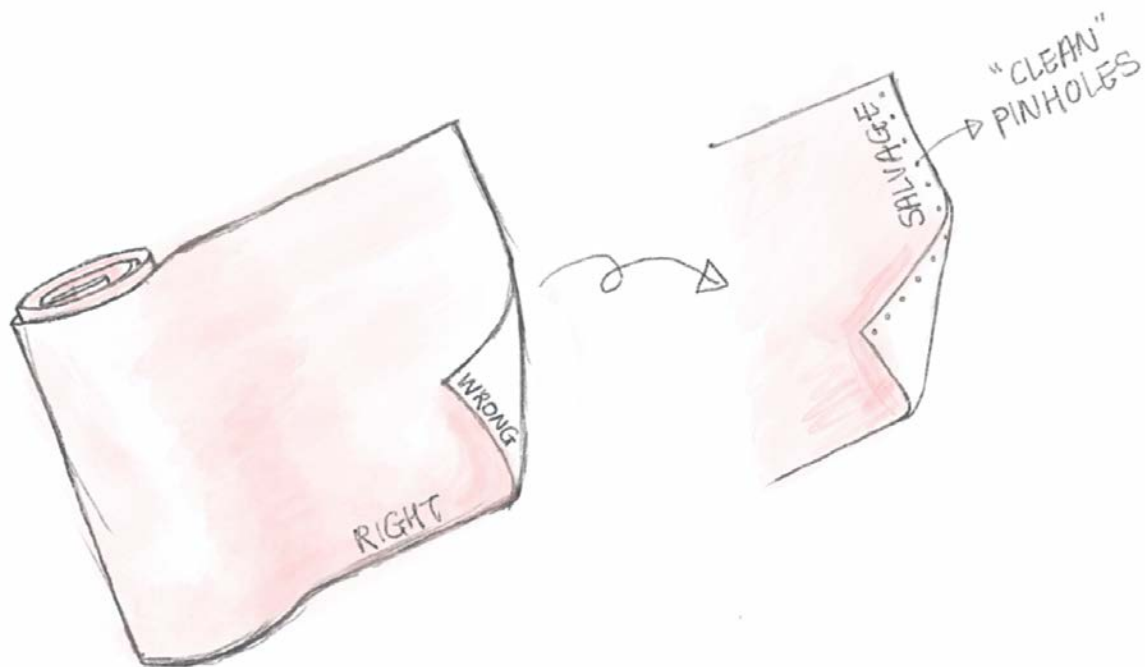

All fabrics have a right side and wrong side. The right side is mostly worn visibly to the outside whereas the wrong side should be on the inside of the garment. Some fabrics are easy to identify the right or wrong side by sheen or texture, but some might look identical both right and wrong side.

To find out the right and wrong side of the fabric, look for little pinholes along the selvage. The clean side of the holes is the right side.


Seam Allowance

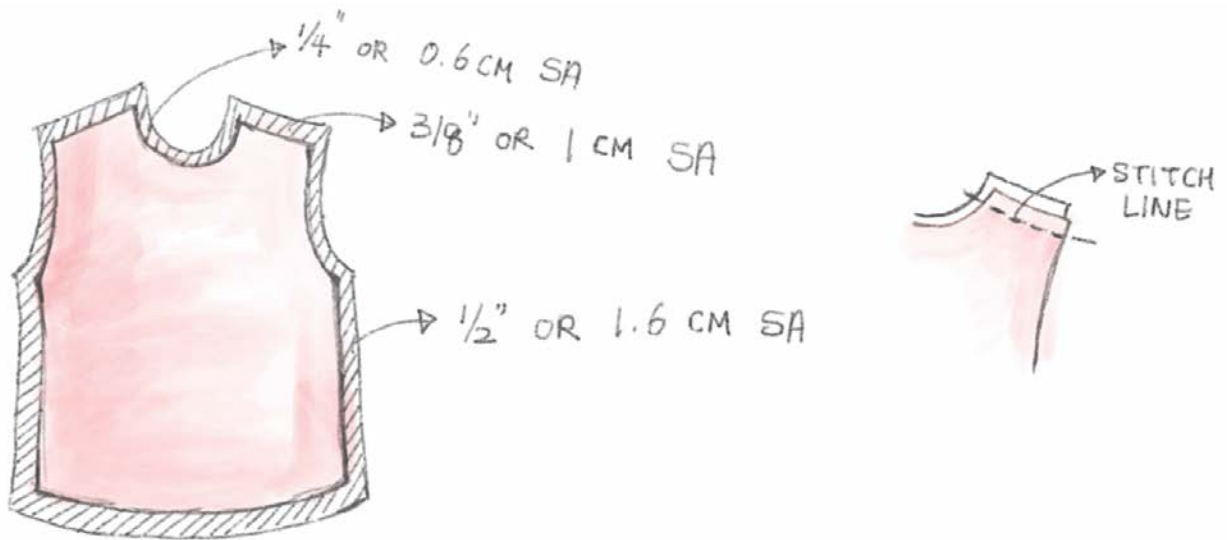

The seam allowance or SA is the extra fabric next to the stitch line all around each pattern piece. The additional space allows us to sew everything together.


Depending on the seams and styles, the seam allowance is usually ($\frac{1}{4}"$, $\frac{3}{8}"$, $\frac{1}{2}"$) or (.6cm, 1cm or 1.2cm) width. Always refer to the pattern and instruction booklet for accurate seam allowance amount.

Topstitch

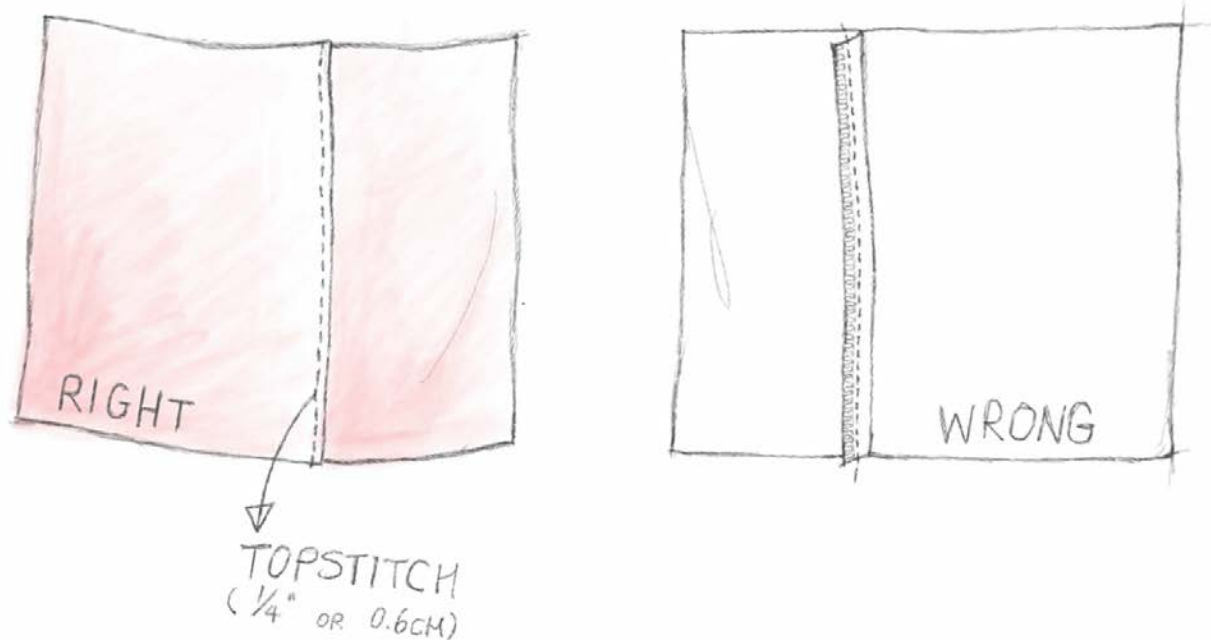

The purpose of top stitches are to add strength to the garment. Iron the seam allowance to the side. Straight stitch $\frac{1}{8}$ " or 0.3cm, or $\frac{1}{4}$ " or 0.6cm away from the original seam to sew the right side and seam allowance together.

Twin Needle

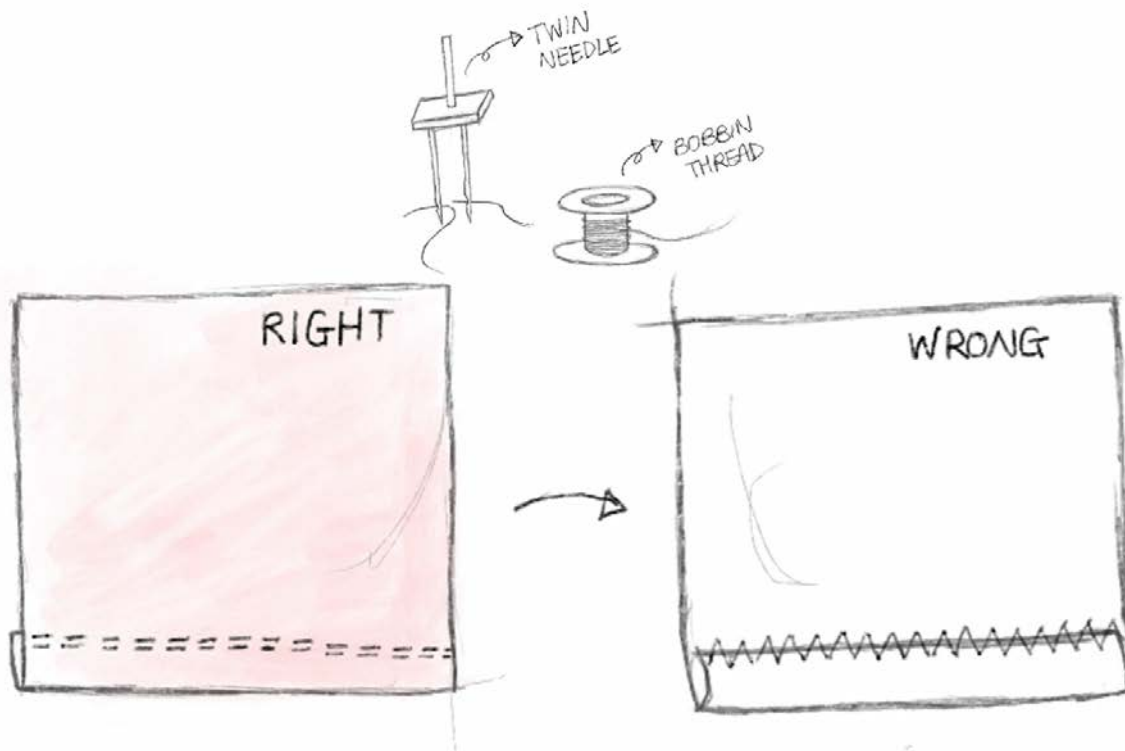

Twin needles are used in knit casual or sportswear for clean finishing without needing a double fold hemming method. The 2 top threads and 1 bobbin thread create parallel topstitch on the right side of the fabric and zigzag stitch on the wrong side of the fabric.