

# FUJITSU

Air Conditioning Systems

## AIRSTAGE

- ✓ Up to 20.0 SEER
- ✓ Durability
- ✓ Reliability
- ✓ Quality

### FEATURES

- Indoor unit with HCRC (High Corrosion Resistant Copper coils)
- High voltage electric components are coated with silicon to prevent damage
- Compact outdoor unit
- Easy Maintenance
- Quiet Operation
- Washable filter
- Wireless Remote Controller
- WiFi



### MOST EFFICIENT

All systems feature high efficiencies and are **ENERGY STAR**<sup>®</sup> Most Efficient 2020 Qualified, meaning lower utility bills for home and business owners.

# WALL MOUNTED HIGH-SEER

## 9,12,18,24,30 and 36 BTU Systems

Systems 9LPAS, 12LPAS, 18LPAS, 30LPAS, 36LPAS



Extended 12-12 Warranty  
Available through qualified contractors


## INVERTER



Please complete product registration at [www.fujitsugeneral.com](http://www.fujitsugeneral.com) to validate your new warranty  
**WWW.CIUDADAIRE.COM**



		<b>09LPAS1</b>		<b>12LPAS1</b>		<b>18LPAS1</b>		<b>24LPAS1</b>		<b>30LPAS1</b>		<b>36LPAS1</b>		
<b>Performance</b>														
Rated Cooling	BTU/h	9,000		12,000		18,000		24,000		30,000		33,000		
Min.-Max. Cooling	BTU/h	3,300—10,800		3,400—12,700		4,000—19,000		4,000—24,400		9,900—32,400		9,900—34,100		
Rated Heating	BTU/h	10,000		14,000		18,000		24,000		30,000		34,000		
Min.-Max. Heating	BTU/h	2,600—12,500		3,100—17,000		2,800—24,000		2,900—29,000		8,700—33,000		8,700—35,000		
SEER	SEER2	Btu/hW	20.0	20.0	20.0	20.0	20.0	20.0	19.0	19.0	18	18	18	18
HSPF	HSPF2	Btu/hW	11.0	10.5	11.0	10.5	11.0	10.5	11.0	9.8	11.0	9.8	11.0	9.6
EER	EER2	Btu/hW	12.5	12.5	11.0	11.0	12.0	12.0	9.2	9.2	9.8	9.8	8.1	8.1
Clg. Operating Range	°F (°C)°F	14 to 115 (-10 to 46)		14 to 115 (-10 to 46)		14 to 115 (-10 to 46)		14 to 115 (-10 to 46)		14 to 115 (-10 to 46)		14 to 115 (-10 to 46)		
Htg. Operating Range	°F (°C)°F	5 to 75 (-15 to 24)		5 to 75 (-15 to 24)		5 to 75 (-15 to 24)		5 to 75 (-15 to 24)		5 to 75 (-15 to 24)		5 to 75 (-15 to 24)		
Moisture Removal	Pt./h	2.7 (1.3)		3.8 (1.8)		4.0 (1.9)		6.3 (3.0)		9.7 (4.6)		10.1 (4.8)		
<b>Fan (Cooling Mode)</b>														
Air Circulation:	CFM	412 (700)		453 (770)		530 (900)		642 (1,090)		812 (1,380)		812 (1,380)		
Medium	CFM	330 (560)		353 (600)		471 (800)		471 (800)		665 (1,130)		665 (1,130)		
Low	CFM	253 (430)		265 (450)		377 (640)		377 (640)		536 (910)		536 (910)		
Quiet	CFM	159 (270)		147 (250)		241 (410)		306 (520)		418 (710)		418 (710)		
Fan Speed Stages		4+Auto4+Auto		4+Auto4+Auto		4+Auto		4+Auto		4+Auto		4+Auto		
<b>Sound Levels</b>														
Indoor (Clg/Htg): Hi	dB(A)	40/42		43/43		44/43		49/47		50/49		50/49		
Medium	dB(A)	34/36		36/38		42/39		42/43		45/44		45/44		
Low	dB(A)	29/31		30/33		37/34		37/37		38/38		38/38		
Quiet	dB(A)	19/21		19/21		26/28		31/32		32/32		32/32		
Outdoor Clg/Htg	dB(A)	47/48		47/48		50/50		53/54		52/54		53/54		
<b>Electrical</b>														
Voltage/Frequency/Phase		208-230/60/1208-		208-230/60/1208-		208/230 V ~ 60		208/230 V ~ 60		208/230 V ~ 60 Hz		208/230 V ~ 60 Hz		
Circuit Breaker	AmpsAmps	15		15		15		20		30		30		
Current Rated/Max: Clg.	AmpsAmps	3.5/ 6.4		4.9/6.9		6.7/9.9		11.4/14.4		13.4/18.9		17.8/18.9		
Current Rated/Max: Htg.	AmpsAmps	3.7/7.9		4.9/7.9		5.9/11.9		9.1/13.9		10.9/18.9		13.5/18.9		
Power Use Rated/Max: Clg.	kWkW	0.72/1.18		1.09/1.33		1.50/1.90		2.60/3.20		3.07/4.03		4.08/4.29		
Power Use Rated/Max: Htg.	kWkW	0.74/1.23		1.10/1.61		1.33/2.10		2.07/3.10		2.46/3.15		3.09/3.32		
<b>Size &amp; WeightSize &amp; Weight</b>														
Net Weight	lbs. (kg)	21 (9.5)	51 (23)	22 (10.0)	68 (31)	29 (13)	86 (39)	29 (13)	86 (39)	39 (17.5)	117 (53)	39 (17.5)	117 (53)	
Dimensions: Height	Inch	10-5/8	21-5/16	10-5/8	21-5/16	11	24-7/8	11	24-7/8	13-3/8	31	13-3/8	31	
Width	Inch	32-13/16	26-1/8	32-13/16	31-7/16	38-9/16	31-7/16	38-9/16	31-7/16	45-1/4	37	45-1/4	37	
Depth	Inch	8-3/4	11-7/16	8-3/4	11-7/16	9-7/16	11-7/16	9-7/16	11-7/16	11	12-5/8	11	12-5/8	
Refrigerant		R410A		R410A		R410A		R410A		R410A		R410A		
<b>Additional Data</b>														
Air Direction: Horiz.		Manual		Manual		Manual		Manual		Manual		Manual		
Vertical		Automatic		Automatic		Automatic		Automatic		Automatic		Automatic		
Air Filter Type		Washable		Washable		Washable		Washable		Washable		Washable		
Min. Lineset Length	Ft (m)	16 (5)		16 (5)		16 (5)		16 (5)		16 (5)		16 (5)		
Max. Lineset Length	Ft (m)	66 (20)		66 (20)		66 (20)		66 (20)		164 (50)		164 (50)		
		(pre-charge: 49')		(pre-charge: 49')		(pre-charge: 49')		(pre-charge: 49')		(pre-charge 66')		(pre-charge 66')		
Max. Vertical Diff.	Ft (m)	49 (15)		49 (15)		49 (15)		49 (15)		98 (30)		98 (30)		
Lineset Size	Inch	Gas 3/8	Liq. 1/4	Gas 3/8	Liq. 1/4	Gas 1/2	Liq. 1/4	Gas 1/2	Liq. 1/4	Gas 5/8	Liq. 3/8	Gas 5/8	Liq. 3/8	
<b>Models</b>		Indoor ASUH09LPAS	Outdoor AOUH09LPAS1	Indoor ASUH12LPAS	Outdoor AOUH12LPAS1	Indoor ASUH18LPAS	Outdoor AOUH18LPAS1	Indoor ASUH24LPAS	Outdoor AOUH24LPAS1	Indoor ASUH30LPAS	Outdoor AOUH30LPAS1	Indoor ASUH36LPAS	Outdoor AOUH36LPAS1	

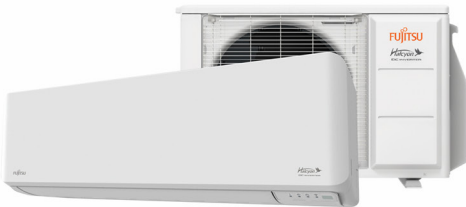

Fujitsu Limited Warranties for Residential Products



Extended 12-12 Warranty Available through qualified contractors

The Fujitsu logo is a registered trademark of Fujitsu Limited. the Halcyon logo and name is a trademark of Fujitsu General America, Inc. ENERGY STAR is a registered trademark of the EPA and DOW. Copyright 2015 Fujitsu General America, Inc. Proper sizing and installation of equipment is critical to achieve optimal performance. Split system air conditioners and heat pumps must be matched with appropriate coil components to meet ENERGY STAR criteria. Ask your contractor for details or visit [www.energystar.gov](http://www.energystar.gov). Fujitsu's products are subject to continuous improvements. Fujitsu reserves the right to modify product design, specifications and information without notice and without incurring any obligations.



AIRSTAGE

WWW.CIUDADAIRE.COM

